


GDL Coater

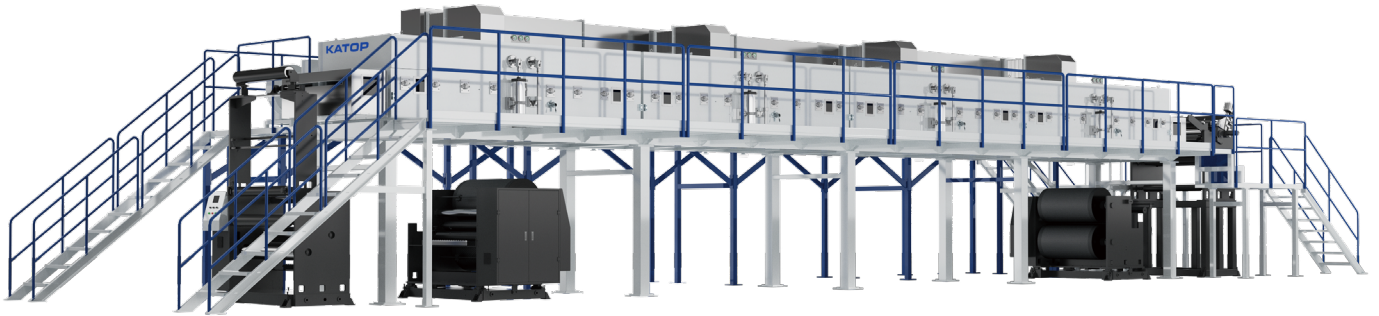

Product Overview

- Applicable to GDL coating process, integrating unwinding, coating, drying, traction and rewinding
- High-temperature threading operation is available when used with auxiliary threading device
- Special splicing methods for carbon paper

Product Features

- Continuous coating through slot die extrusion, scraper and die dipping
- Adopt drive rollers in the dryer to reduce material tension and deformation
- Multi-stage tension control, temperature control
- Automatic metering and speed control device
- EPC
- Reel change without stopping the coater

Product Parameters

Coating width	Customized
Coating speed	MAX:5m/min
Tension control accuracy	±2mm
Maximum heating temperature of drier in drying section	MAX:230°C
