


Separator Coater

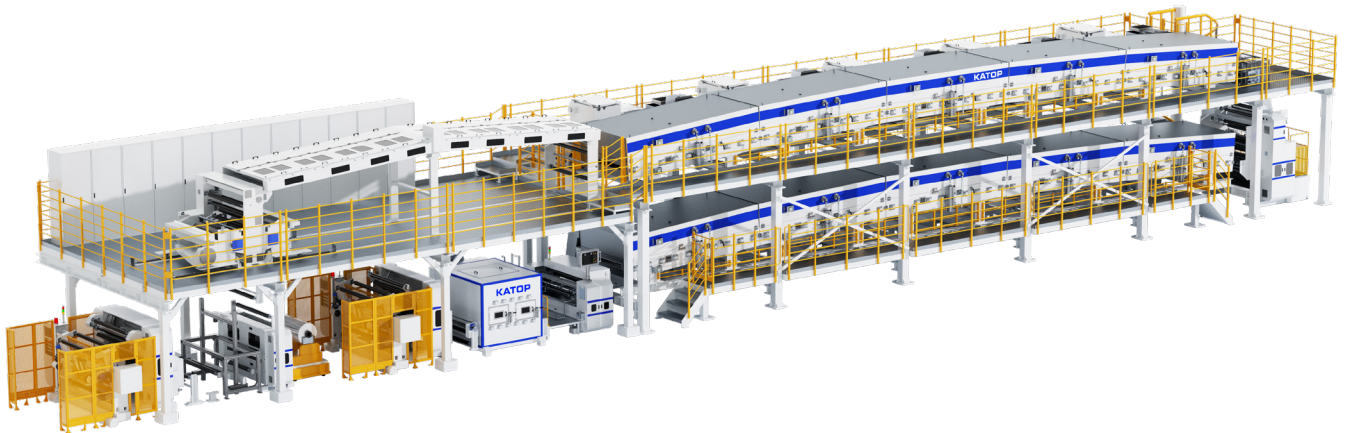

Product Type

Equipment type	Dimension(L*W*H)	Substrate width(mm)	Dryer	Heating mode
KC-CS-750-12-M.M	20000*2800*2900	650	12	Electric
KC-CS-1100-16.16-A.A	30000*3200*3500	1000	16	Electric/heat transfer oil/steam
KC-CS-1300-16.16-A.A	30000*3600*3500	1200	16	Electric/heat transfer oil/steam
KC-CS-1400-16.16-A.A	30000*3800*3500	1300	16	Electric/heat transfer oil/steam
KC-CS-1700-16.16-A.A	30000*4100*3500	1600	16	Electric/heat transfer oil/steam

Product Parameters

Coating product parameters	CCS value	PCS value
Coating method	Microgravure continuous coating	Rotating nozzle coating
Coating speed	MAX:150m/min	
Coating width	MAX:1600mm	
Rewinding tension	3-50N	
Coating thickness accuracy	±0.3μm	
Single side dry film thickness	0.5-4μm	
Substrate thickness	5-25μm	
Reel diameter/weight	MAX:Φ500mm/150kg	